


U-Sections	Width	Height	Thickness		Sectional Area	Mass		Moment of Inertia	Elastic Section Modulus	Plastic Section Modulus	Class* S390GP
	b	h	t	s (min)		kg/m	kg/m <sup>2</sup>				
	mm	mm	mm	mm	cm <sup>2</sup> /m	single pile	of wall	cm <sup>4</sup> /m	cm <sup>3</sup> /m	cm <sup>3</sup> /m	
II.W.	600	260	10.3	8.0	131.2	61.8	103	13000	1000	1141	2
III.W.	600	360	13.4	9.0	173.2	81.6	136	32400	1800	2080	2
IV.W.	600	420	18.0	10.3	225.5	106.0	177	56700	2700	3119	2

\* Classification according to BS EN 1993-5

**ZU**  
SECTIONS

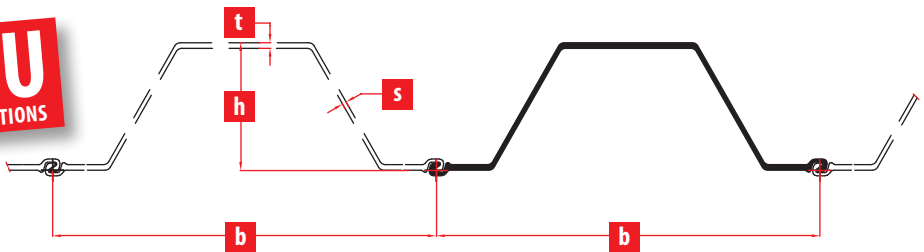

ZU-Sections	Width	Height	Thickness		Sectional Area	Mass		Moment of Inertia	Elastic Section Modulus	Plastic Section Modulus	Class* S390GP
	b	h	t	s (min)		kg/m	kg/m <sup>2</sup>				
	mm	mm	mm	mm	cm <sup>2</sup> /m	single pile	of wall	cm <sup>4</sup> /m	cm <sup>3</sup> /m	cm <sup>3</sup> /m	
ZU-900	900	230	10.8	8.3	122.2	86.4	96	10500	902	1050	2
ZU-1600	900	300	13.2	9.6	160.4	113.4	126	24400	1610	1850	2

\* Classification according to BS EN 1993-5

For further details on our innovative sheet pile solutions  
or steel sheet pile sales please visit our website at:  
[www.sheetpilinguk.com](http://www.sheetpilinguk.com)

**TEL: 01772 794141**

Oakfield House | Rough Hey Road | Grimsargh | Preston | PR2 5AR


## Key Benefits:

- Supplied in Grade S390GP (min) steel to BS EN 10248 Pt 1 with mill certificates available upon request.
- Product tolerances independently certified as complying with requirements of BS EN 10248 Pt 2.
- Hot rolled sections with quality proven Larssen type interlock.
- Extremely competitive section modulus/mass ratio.
- Can be used for both temporary and permanent works applications.
- Corrosion charts and residual section properties information available. Visit our 'Product Sales' section at: [www.sheetpilinguk.com/](http://www.sheetpilinguk.com/)
- Available ex. stock for immediate delivery on a 'Sale' or 'Sale and Buy Back' basis.

## Also Available:


**E20**

Mass = 15.38 kg/m



**E22**



Mass = 10.22 kg/m



Interlocking Corner or  
Junction Clutch Bar

**E21**

Mass = 6.27 kg/m



**OMEGA**

Mass = 17.33 kg/m

For further details on our innovative sheet pile solutions  
or steel sheet pile sales please visit our website at:  
[www.sheetpilinguk.com](http://www.sheetpilinguk.com)

**TEL: 01772 794141**

Oakfield House | Rough Hey Road | Grimsargh | Preston | PR2 5AR