
Specification Sheet **PVE 38M**

Standard Frequency Vibro Hammer

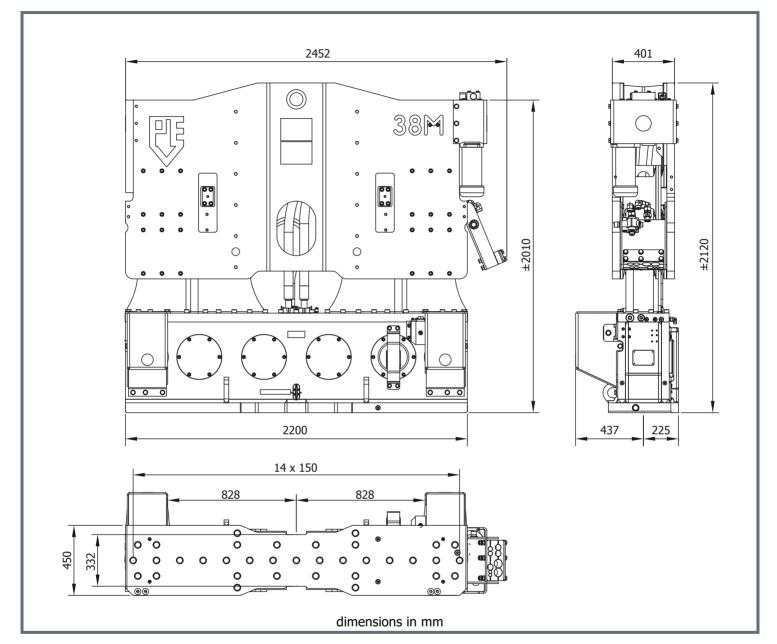

Specifications	38M				
Eccentric moment	3300	inch-lbs	Clamps:		
Max. centrifugal force	135	tons	Sheet pile clamp	DWK 150T	
Max. frequency	1700	rpm	Transport weight per piece	2800	lbs
Max. amplitude excluding DWK 150T	0.98	inch	Double clamps	PPK 80T	
Max. amplitude including DWK 150T	0.7	inch	Transport weight per piece	1102	lbs
Max. static line-pull	45	tons			
Max. operating pressure	5080	psi	Powerpack:		
Max. oil flow	133	gpm	Model	500	
Forced lubrication	yes				
Dynamic weight excluding DWK 150T	6610	lbs	Hose set:		
Dynamic weight including DWK 150T	9410	lbs	Length	98	feet
Total weight excluding DWK 150T & hoses	11900	lbs	Transport weight (±)	1323	lbs